EX-SFP-10GE-DAC-5M-AO
JUNIPER, 10GBASE-CU SFP+
TWINAX 5M PASSIVE

addon
MEDIA CONVERTERS - MEMORY UPGRADES
BATTERIES - NETWORKING TRANSCEIVERS

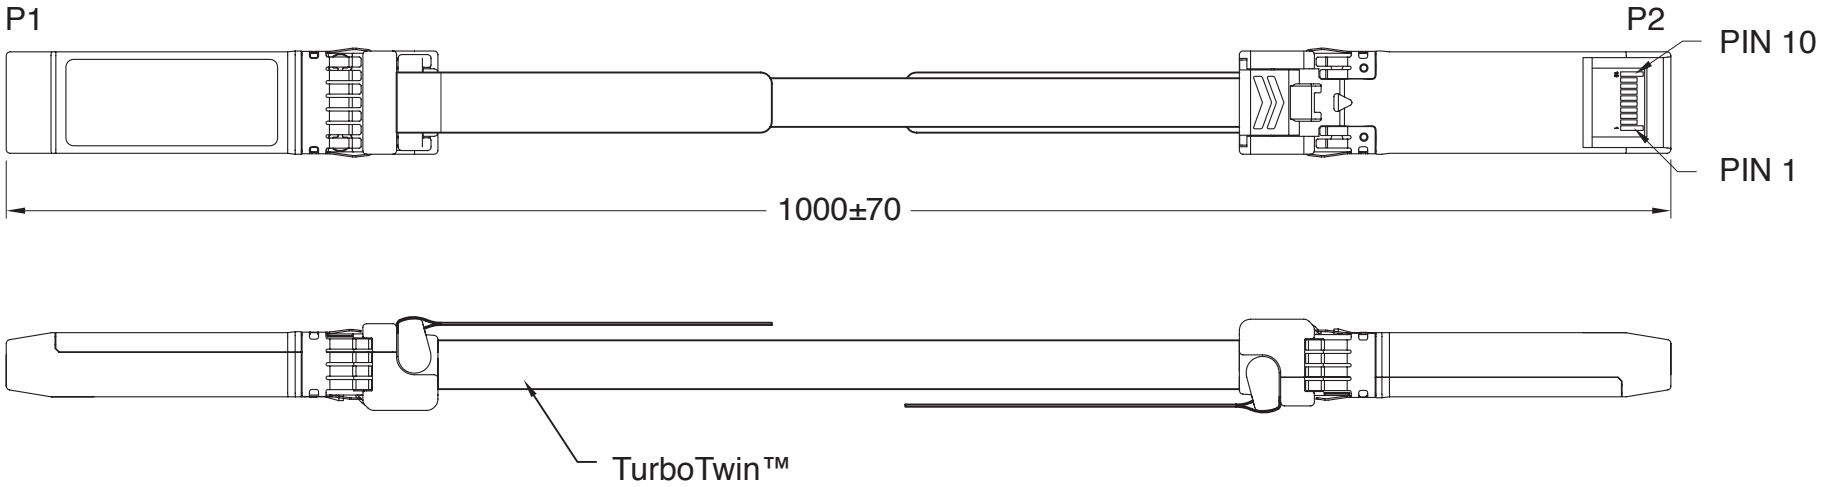

1. CABLE:
   - Conductor: 24AWG solid silver plated copper.
   - Insulation: Foam polyolefin.
   - Pair: 2 singles laid flat and parallel.
   - Pair Drain Wire: 26AWG solid silver plated copper.
   - Pair Shield: Aluminum/Polyster tape. Aluminum side facing in, 25% overlap. Color: Yellow.
   - Inner Shield: Aluminum/Polyester type. Aluminum side facing out, 25% overlap.
   - Outer Shield: 36AWG tin plated copper braid, 85% coverage.
   - Diameter: 6.86mm nominal. Color: Black.
   - Print Legend: “Type CL2 75° 24AWG (UL) Madison Cable CSA AWM II A/B 75C 30B FT4 TurboTwin™ 10G RoHS Compliant”
   - Differential Impedance: 100±5 OHMS @ TDR
   - UL Listing: Type CL2 as specified in articale 725 of the National Electrical Code. TurboTwin™
2. HOOD: Xinc die Casting, Nickel Plating.
3. LATCH: PC Resin UL94V, Color: Black.
4. P.C.B.: 4 Layers, FR4. 30U” Cold on Golden Fingers.

WIRING CHART			
P1 END		P2 END	
P1 PAD	SIGNAL	P2 PAD	SIGNAL
12	RX-	19	TX-
13	RX+	18	TX+
GROUND		GROUND	
18	TX+	13	RX+
19	TX-	12	RX-
GROUND		GROUND	